


Extruded Rail

C650 Rails

■ C650 Rails

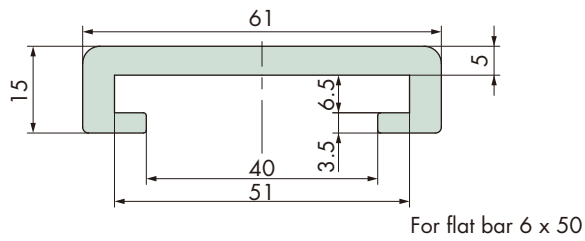


Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-C650-W-2M	10-100EX	White	2	-20 to 60
PR-C650-W-3M			3	
PR-C650-W-4M			4	
PR-C650-B-2M	10-806EX	Black	2	
PR-C650-PLF-2M			2	
PR-C650-PLF-3M			3	
PR-C650-PLF-4M	PLF Note: 3	White	4	

Note: 1. Tsubaki model no. in boldface are standard products. Tsubaki model no. in normal face are made-to-order products.
 2. Dimensions are nominal due to extruded products.
 3. Available with standard length per unit only.

C675 Rails

■ C675 Rails

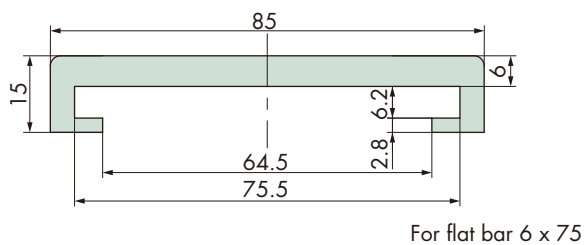


Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-C675-W-2M	10-100EX	White	2	-20 to 60
PR-C675-W-4M			4	
PR-C675-PLF-2M	PLF <small>Note: 3</small>		2	
PR-C675-PLF-3M			3	
PR-C675-PLF-4M			4	

Note: 1. Tsubaki model no. in boldface are standard products. Tsubaki model no. in normal face are made-to-order products.
 2. Dimensions are nominal due to extruded products.
 3. Available with standard length per unit only.

GR4301 Rails

■ GR4301 Rails

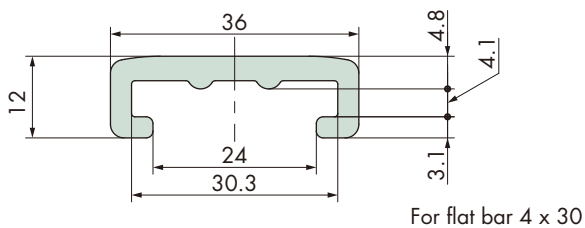

Tsubaki model no.	Material grade	Color	Length m	Operating temperature range °C
PR-GR4301-W-3M	10-100EX	White	3	-20 to 60

Note: 1. Made-to-order product.
 2. Dimensions is a nominal due to extruded product.