


# Product Guide Parts

## Cross Block (CC)

Use the cross block in combination with the T-shaped clamp or photosensor clamp when installing the guide or sensor.

For exclusive use with round bar guide




Material: Body = Polyacetal  
Bolt } = Stainless steel  
Nut }

| Tsubaki model no. | $\phi DP$ |
|-------------------|-----------|
| TP-C13S00109T-CC  | $\phi 15$ |


Note: Standard product

For an example of installation, refer to page 224.

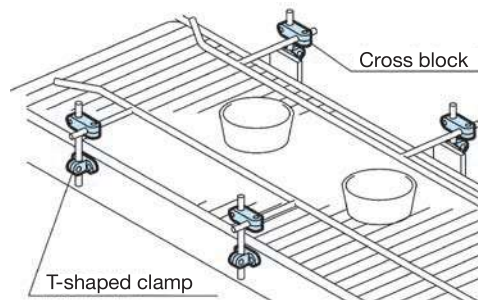

- Bolt tightening torque 2.94N·m {0.3kgf·m}
- Allowable load of pin (holding force) 49.0N {5kgf}

For use with round bar and square bar guide




Material: Body = Polyacetal  
Bolt } = Stainless steel  
Nut }

- Bolt tightening torque 2.94N·m {0.3kgf·m}
- Allowable load of pin (holding force) 49.0N {5kgf}

| Tsubaki model no. | $\phi DP$ | □A |
|-------------------|-----------|----|
| TP-C13S00114T-CC  | 10        | 8  |
| TP-C13S00115T-CC  | 12        | 10 |
| TP-C13S00116T-CC  | 14        | 12 |

Note: Standard product

High-strength type



Material: Body = Reinforced polyamide  
Bolt } = Stainless steel  
Nut }

- Bolt tightening torque 4.9N·m {0.5kgf·m}
- Allowable load of pin (holding force) 98.1N {10kgf}

| Tsubaki model no. | $\phi DP$ |
|-------------------|-----------|
| TP-C13108T-CC     | 15        |

Note: Standard product

Dimensions in mm