



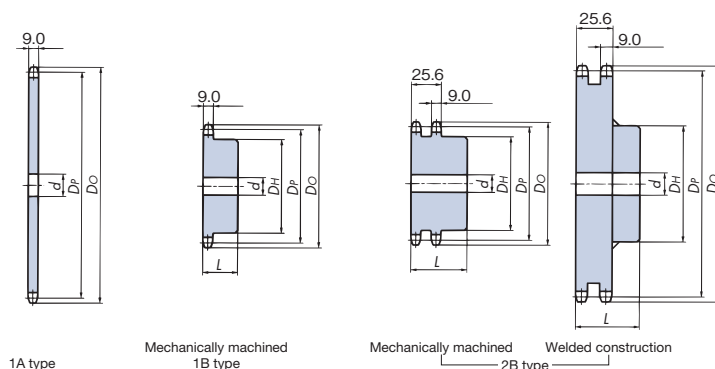

Number of teeth	Note 4 Outer Dia. D_o	Pitch circle dia. D_p	1A type			1B type						2B type						Number of teeth
			Pilot bore d	Approx. mass kg	Construction/ material	Bore dia. d		Hub		Approx. mass kg	Construction/ material	Bore dia. d		Hub		Approx. mass kg	Construction/ material	
						Pilot bore	Max.	Dia. D_H	Length L			Pilot bore	Max.	Dia. D_H	Length L			
9	52	46.42			Mechanically machined: structural carbon steel	9.53	19.22	34	25	0.20	* *<							

- Note: 1. Maximum bore diameters shown are standard figures. Determine bore diameter and key bearing pressure based on general mechanical design.
 2. Models in shaded areas have hardened teeth.
 3. Models with unhardened teeth as standard can be manufactured with hardened teeth.
 4. The outer diameters shown above are for 1B. The outer diameters for other models may differ.
 5. Models marked with an * above have a groove around the periphery of the hub (shown in the diagram on the right). Groove outer diameter is 27 for 9T, 32 for 10T, 37 for 11T, 42 for 12T, and 47 for 13T.
 6. Welded construction: Carbon steel for machine structural use (teeth and hub).
 7. Made-to-order.



Model numbering example

RS10B -1 B 36T

Size Number of strands Number of teeth

Hub type

Hardened teeth model numbering example

RS10B -1 B 9T Q

Size Number of strands Number of teeth

Hub type

Hardened teeth